


EcoChromo GD2 Duo

White lined chipboard coated on both sides with grey middle layer



GRAMMAGE	THICKNESS	BULK
g/m ²	µm	cm ³ /g
475	500	1.05
500	670	1.34
600	820*	1.37
700	960*	1.37
800	1100*	1.38
900	1200*	1.33
1000	1350*	1.35
1100	1450*	1.32
1200	1600*	1.33
1300	1720*	1.32
1400	1860*	1.33
1500	2000*	1.33
1600	2100*	1.31
1700	2200*	1.29
1800	2300*	1.28
1900	2450*	1.29
2000	2600*	1.30

*intended for screen printing

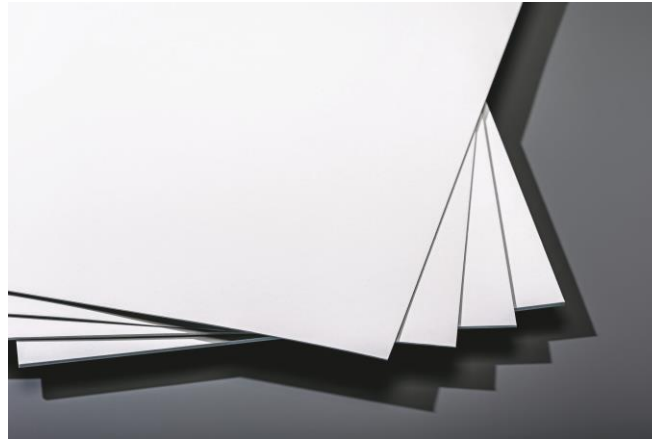

APPLICATIONS

Graphics • POS displays • folding cartons

PRINTING

Offset printing • flexographic printing • screen printing

CONVERSION

UV, water-based and conventional varnish • foil and film lamination • hot foil stamping and cold foil transfer • embossing (high, relief, structure, micro) • die cutting, creasing, grooving, perforating, flock coating

ADDITIONAL INFORMATION

www.kapag.com

Tolerances / Testing Standards

Grammage (DIN ISO 536) ± 5%
 Thickness (DIN EN 20534) ± 5%
 Bulk ± 5%
 Stiffness (DIN 53121).....- 15%
 Brightness (ISO 2470) ± 1.5 Elrepho (front and reverse side)
 Opacity (ISO 2471)
 Roughness (ISO 8791/4)

Print Surface Properties

ISO Brightness (front and reverse side)..... 85%
 Roughness
 Opacity



The mark of
responsible forestry
FSC® C058892